

A1500-S4-V240 Reciprocating Medical Air System

System is NFPA compliant and has modular construction and interconnecting piping.

PUMP MODULE

The belt driven oil-less piston compressor delivers pressures up to 115 psi. Each module includes the compressor; motor; drive belts with belt guard; inlet filter; isolation valve; aftercooler; temperature switch for each cylinder, unloader solenoid, and relief valve.

AIR TREATMENT MODULE

The system's air treatment module features dual desiccant dryers configured for energy savings. They purge only when needed per the dew point setting. The dew point and CO transducers are integrated with the electrical panel. The module also contains prefilters, after filters, and activated carbon filters. Final line pressure regulators with gauges and relief valves are also part of the air treatment module.

AIR RECEIVER

The receiver is constructed to ASME standards and is galvanized for corrosion resistance. A source isolation valve and 3 valve bypasses are provided with the receiver module. A pressure gauge and relief valve are included, along with a sight window and electric auto drain. Mounting pads and flexible connectors are provided.

CONTROL PANEL

The UL listed electrical control panel features a high-definition color touch screen that can be set up externally without the use of toggle switches. The panel displays multiple conditions, including compressor running status, elapsed hours, pressure level, and audio/visual alarms.

Standard features include lag alarm, automatic compressor alternation, adjustable minimum run timer, adjustable pressure settings, adjustable screen brightness, alarm history registry, and data logging. The panel has standard dry contacts and Modbus interface with building management systems. Ethernet and BACnet are available as options. The panel's maintenance menu includes service items and maintenance warnings, and it is programmed for both English and Spanish languages.

Configuration	Quadruplex Stack Mount
System Capacity*	180 SCFM @ 50 psi 60 Hz. 150 SCFM @ 50 psi 50 Hz.
Horsepower (Each Pump)	15 HP
Horsepower (Total System)	60 HP
Available Voltage	208/230/460 v. 3 phase 60 Hz. 380 v. 3 phase 50 Hz. Contact Factory for other voltages
Full Load Amps 3 ph.	208 volts: 195.3 230 volts: 177.5 380 volts: 102.5 460 volts: 89
Tank Size	240 gallon vertical
Key Options	Bacterial filters for dryer/filter skid. Can be configured for lab use without lag alarm. Expandable for additional compressors.

Click here for compressor specifications and industry-leading parts support.



*System capacity is stated with one pump in reserve per NFPA. Capacity based on operation at sea level. For higher altitude, contact factory for adjusted capacity.





SYSTEM MODEL NO.	PART NO.	HP EACH	SCFM/ACFM @ 50 PSIG EACH	SCFM/ACFM @ 100 PSIG EACH	DESIGN CAPACITY (lb 30PSIG EACH)	RECEIVER SIZE (GALLONS)	PUMP DISCHARGE (NPT)	ESTIMATED SYSTEM WEIGHT (LB)
A1300B-314-DD	ADM1500(C)-480-S4-V240-DD	15	58	55	174	240	1"	4800

SPACE ALLOWANCE FOR MAINTENANCE = 3 FT ON ALL SIDES. MORE SPACE IS REQUIRED FOR THE OPENING OF LARGER PANEL DOORS.

TABLE 1

SYSTEM LISTED ARE 480V. IF ANOTHER VOLTAGE IS REQUIRED, USE THE FOLLOWING PART NUMBERS.

VOLTAGE	SYSTEM P/N	PUMP MODULE P/N	TRIP MODULE P/N
208-40-3	ADM1500(C)-208-S4-V240-DD	100-0224	214539
230-40-3	ADM1500(C)-230-S4-V240-DD	100-0224	214539
380-50-3	ADM1500(C)-380-S4-V240-DD	100-0224	214546

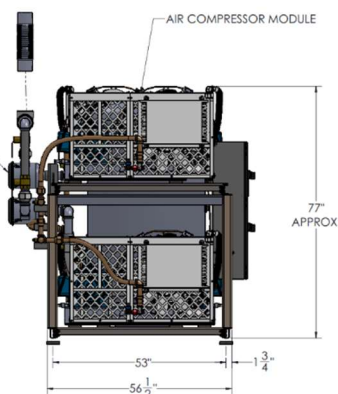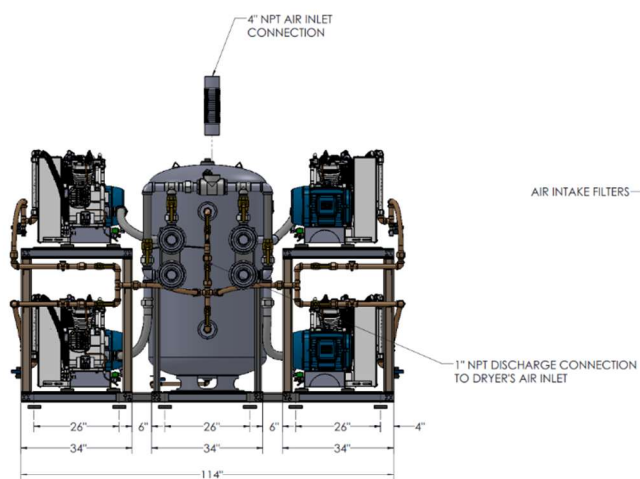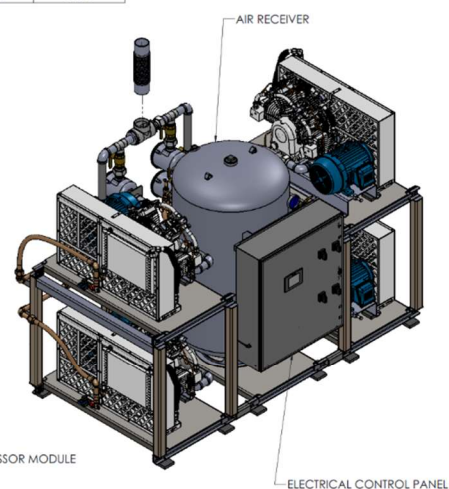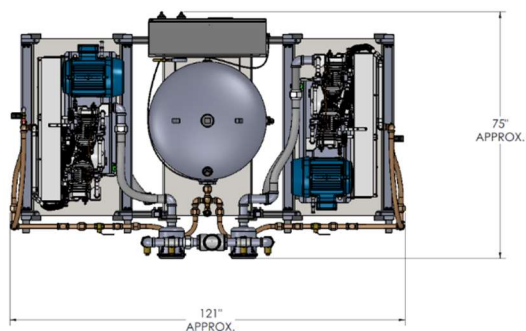

Q1	N/A	INITIAL RELEASE	05/06/20	F.L.
Q2	000-00	RECEIPT OF CHARGE		
Q3				
Q4				
Q5				
Q6				
Q7				
Q8				
Q9				
Q10				
Q11				
Q12				
Q13				
Q14				
Q15				
Q16				
Q17				
Q18				
Q19				
Q20				
Q21				
Q22				
Q23				
Q24				
Q25				
Q26				
Q27				
Q28				
Q29				
Q30				
Q31				
Q32				
Q33				
Q34				
Q35				
Q36				
Q37				
Q38				
Q39				
Q40				
Q41				
Q42				
Q43				
Q44				
Q45				
Q46				
Q47				
Q48				
Q49				
Q50				
Q51				
Q52				
Q53				
Q54				
Q55				
Q56				
Q57				
Q58				
Q59				
Q60				
Q61				
Q62				
Q63				
Q64				
Q65				
Q66				
Q67				
Q68				
Q69				
Q70				
Q71				
Q72				
Q73				
Q74				
Q75				
Q76				
Q77				
Q78				
Q79				
Q80				
Q81				
Q82				
Q83				
Q84				
Q85				
Q86				
Q87				
Q88				
Q89				
Q90				
Q91				
Q92				
Q93				
Q94				
Q95				
Q96				
Q97				
Q98				
Q99				
Q100				

