

# S750-T2-H200 Rotary Vane Medical Vacuum System

System is NFPA compliant and has modular construction and interconnecting piping.

## PUMP MODULE

Oil sealed rotary vane vacuum pump with NEMA motor. Each pump module is equipped with an inlet filter, check valve, pump isolation valve, and temperature switch.

## SYSTEM CONTROLS

The UL listed electrical control panel features a high-definition color touch screen that can be set up externally without the use of toggle switches. The panel displays multiple conditions, including pump running status, elapsed hours, vacuum level, and audio/visual alarms.

Standard features include lag alarm, automatic pump alternation, adjustable minimum run timer, adjustable vacuum settings, adjustable screen brightness, alarm history registry, and data logging. The panel has standard dry contacts and Modbus interface with building management systems. Ethernet and BACnet are available as options. The panel's maintenance menu includes service items and maintenance warnings, and it is programmed for both English and Spanish languages.

## VACUUM RECEIVER

Constructed to ASME standards and rated for full vacuum. Equipped with valved bypass, high visibility vacuum gauge, source isolation valve, and a manual drain valve. Mounting pads and flex connectors supplied for field installation.

## KEY OPTIONS

Variable Speed Drive Electrical Panel  
Configurable for Lab or Industrial Applications  
Gas Purge System for Lab use

<b>Configuration</b>	Duplex Tank Mount
<b>System Capacity*</b>	60.1 SCFM @ 19" Hg. 60 Hz. 50 SCFM @ 19" Hg. 50 Hz.
<b>Horsepower (Each Pump)</b>	7.5 HP
<b>Horsepower (Total System)</b>	15 HP
<b>Available Voltage</b>	208/230/460 v. 3 phase 60 Hz. 380 v. 3 phase 50 Hz. Contact Factory for other voltages
<b>Full Load Amps 3 ph.</b>	208 volts: 49.6 230 volts: 45.1 380 volts: 27.4 460 volts: 22.6
<b>Tank Size</b>	200 gallon horizontal
<b>Bacterial Filter Bank (option)</b>	BOM-MED FB-2



Click here for pump specifications  
and industry-leading parts support

\*System capacity is stated with one pump in reserve per NFPA. Capacity based on operation at sea level.  
For higher altitude, contact factory for adjusted capacity.





SYSTEM MODEL NO.	PART NO.	HP EACH	SCHWABACH (8 1/2" Hg EACH)	SCHWABACH (8 25" Hg EACH)	DESIGN CAPACITY (8 1/2" Hg EACH)	RECEIVER SIZE (GALLONS)	PUMP INLET NPT	ESTIMATED SYSTEM WEIGHT (LBS)
S750-12	S750-460-T2-H200	7.5	60.0 / 144.4	24.5 / 147.0	60.0	200	2"	1400

SPACE ALLOWANCE FOR MAINTENANCE = 3 FT. ON ALL SIDES. MORE SPACE IS REQUIRED FOR THE OPENING OF LARGER PANEL DOOR.

TABLE 1

SYSTEM LISTED ARE 460V. IF ANOTHER VOLTAGE IS REQUIRED, USE THE FOLLOWING PART NUMBERS.

VOLTAGE	SYSTEM P/N	PUMP MODULE P/N	TRIP MODULE P/N
208-40-3	S750-208-T2-H200	100-0205	21-4546
230-40-3	S750-230-T2-H200	100-0205	21-4546
380-50-3	S750-380-T2-H200	100-0205	21-4546

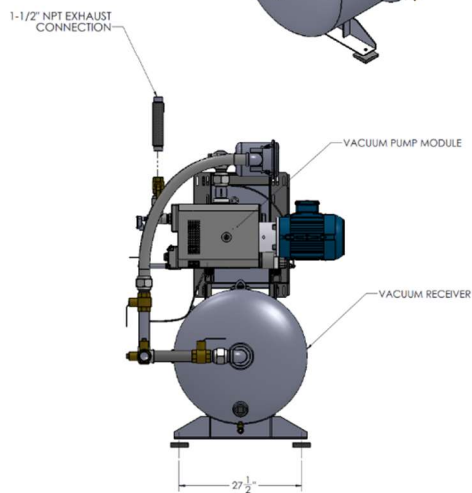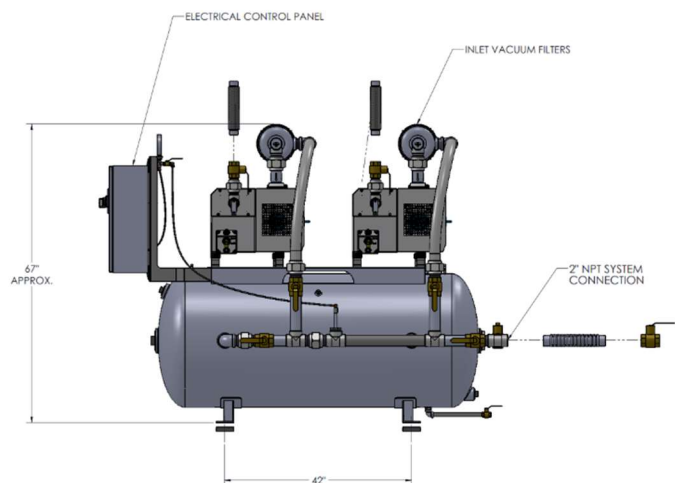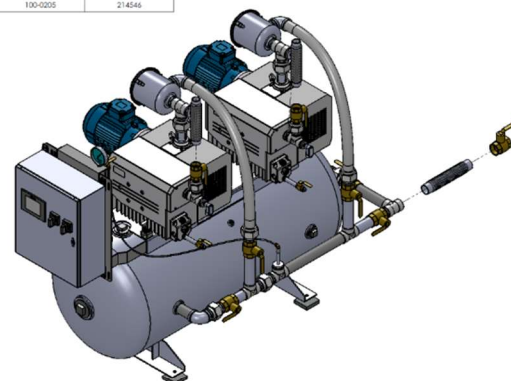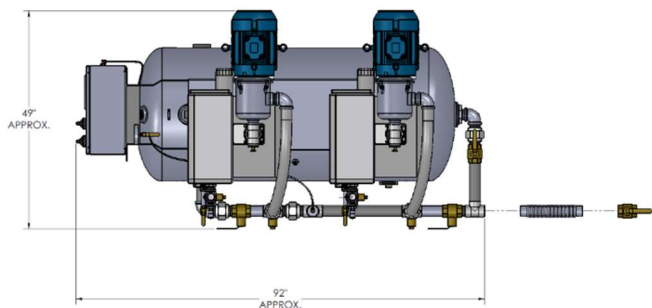

QTY	ITEM NO.	DESCRIPTION	REVISION	DATE	BY
1	1	INITIAL RELEASE	02/06/18		
1	2	REVISION 1	02/06/18		
1	3	REVISION 2	02/06/18		
1	4	REVISION 3	02/06/18		
1	5	REVISION 4	02/06/18		
1	6	REVISION 5	02/06/18		
1	7	REVISION 6	02/06/18		
1	8	REVISION 7	02/06/18		
1	9	REVISION 8	02/06/18		
1	10	REVISION 9	02/06/18		
1	11	REVISION 10	02/06/18		
1	12	REVISION 11	02/06/18		
1	13	REVISION 12	02/06/18		
1	14	REVISION 13	02/06/18		
1	15	REVISION 14	02/06/18		
1	16	REVISION 15	02/06/18		
1	17	REVISION 16	02/06/18		
1	18	REVISION 17	02/06/18		
1	19	REVISION 18	02/06/18		
1	20	REVISION 19	02/06/18		
1	21	REVISION 20	02/06/18		
1	22	REVISION 21	02/06/18		
1	23	REVISION 22	02/06/18		
1	24	REVISION 23	02/06/18		
1	25	REVISION 24	02/06/18		
1	26	REVISION 25	02/06/18		
1	27	REVISION 26	02/06/18		
1	28	REVISION 27	02/06/18		
1	29	REVISION 28	02/06/18		
1	30	REVISION 29	02/06/18		
1	31	REVISION 30	02/06/18		
1	32	REVISION 31	02/06/18		
1	33	REVISION 32	02/06/18		
1	34	REVISION 33	02/06/18		
1	35	REVISION 34	02/06/18		
1	36	REVISION 35	02/06/18		
1	37	REVISION 36	02/06/18		
1	38	REVISION 37	02/06/18		
1	39	REVISION 38	02/06/18		
1	40	REVISION 39	02/06/18		
1	41	REVISION 40	02/06/18		
1	42	REVISION 41	02/06/18		
1	43	REVISION 42	02/06/18		
1	44	REVISION 43	02/06/18		
1	45	REVISION 44	02/06/18		
1	46	REVISION 45	02/06/18		
1	47	REVISION 46	02/06/18		
1	48	REVISION 47	02/06/18		
1	49	REVISION 48	02/06/18		
1	50	REVISION 49	02/06/18		
1	51	REVISION 50	02/06/18		
1	52	REVISION 51	02/06/18		
1	53	REVISION 52	02/06/18		
1	54	REVISION 53	02/06/18		
1	55	REVISION 54	02/06/18		
1	56	REVISION 55	02/06/18		
1	57	REVISION 56	02/06/18		
1	58	REVISION 57	02/06/18		
1	59	REVISION 58	02/06/18		
1	60	REVISION 59	02/06/18		
1	61	REVISION 60	02/06/18		
1	62	REVISION 61	02/06/18		
1	63	REVISION 62	02/06/18		
1	64	REVISION 63	02/06/18		
1	65	REVISION 64	02/06/18		
1	66	REVISION 65	02/06/18		
1	67	REVISION 66	02/06/18		
1	68	REVISION 67	02/06/18		
1	69	REVISION 68	02/06/18		
1	70	REVISION 69	02/06/18		
1	71	REVISION 70	02/06/18		
1	72	REVISION 71	02/06/18		
1	73	REVISION 72	02/06/18		
1	74	REVISION 73	02/06/18		
1	75	REVISION 74	02/06/18		
1	76	REVISION 75	02/06/18		
1	77	REVISION 76	02/06/18		
1	78	REVISION 77	02/06/18		
1	79	REVISION 78	02/06/18		
1	80	REVISION 79	02/06/18		
1	81	REVISION 80	02/06/18		
1	82	REVISION 81	02/06/18		
1	83	REVISION 82	02/06/18		
1	84	REVISION 83	02/06/18		
1	85	REVISION 84	02/06/18		
1	86	REVISION 85	02/06/18		
1	87	REVISION 86	02/06/18		
1	88	REVISION 87	02/06/18		
1	89	REVISION 88	02/06/18		
1	90	REVISION 89	02/06/18		
1	91	REVISION 90	02/06/18		
1	92	REVISION 91	02/06/18		
1	93	REVISION 92	02/06/18		
1	94	REVISION 93	02/06/18		
1	95	REVISION 94	02/06/18		
1	96	REVISION 95	02/06/18		
1	97	REVISION 96	02/06/18		
1	98	REVISION 97	02/06/18		
1	99	REVISION 98	02/06/18		
1	100	REVISION 99	02/06/18		
1	101	REVISION 100	02/06/18		

